


# SCALE-iFlex™ Single

- Fully qualified solution, reduces time-to-market
- Compact footprint, isolated housing
- Advanced Active Clamping
- Comprehensive protection features
- In-line conformal coating

## Ready-to-use Gate Driver Solution for Power Modules up to 3300 V

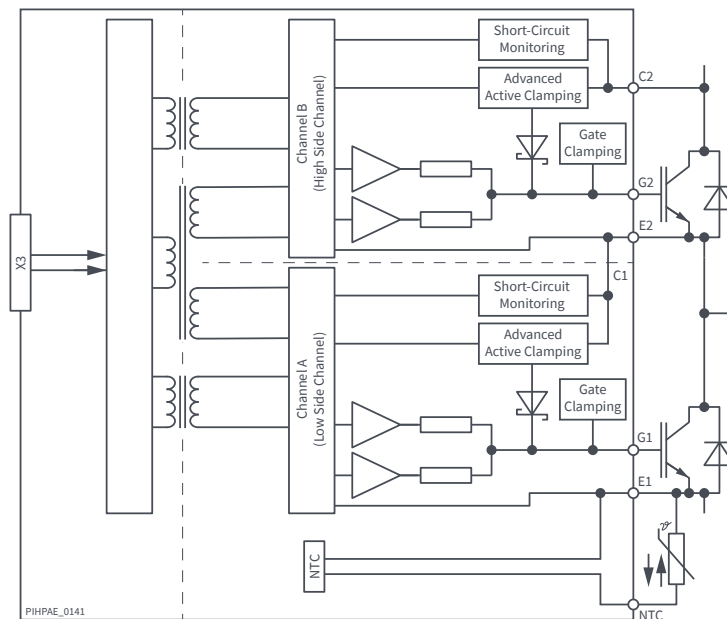

## Applications

- Railway main and auxiliary converters
- Wind converters
- Power quality
- Other high-reliability applications

## Output Power

Part Number	Power Module	Voltage Class	Current Class	Package	Power Device Supplier
2SIS0400T2C0C-33	N.A.	3300 V	N.N.	XHP2, LV100	N.A.
2SMS0220D2C0C-CM1200DC-34X	CM1200DC-34X	1700 V	1200 A	LV100	Mitsubishi



## Design Support

**Data Sheet**      SCALE-iFlex Single data sheet ([www.power.com/scale-iflex-single-data-sheet](http://www.power.com/scale-iflex-single-data-sheet))

**Video**      An introduction to SCALE-iFlex Single ([www.power.com/scale-iflex-single-video](http://www.power.com/scale-iflex-single-video))