

ISO6125R-33

High Voltage Insulated DC-DC Power Supply for Railway Line Gate Driver Families

Product Highlights

Highly Integrated, Compact Footprint

- Ready-to-use DC-DC converter solution for IGBT drivers up to 3300V
- 10 W output power at maximum ambient temperature
- Electrical primary-side interface with basic insulation
- -40 °C to +85 °C operating ambient temperature

Protection / Safety Features

- Creepage distance 21 mm
- Clearance distance 21 mm
- No electrolytic capacitors
- Outstanding coupling capacitance 10 pF
- Applied double sided conformal coating (by using ELPEGUARD SL 1307 FLZ/2 from Lackwerke Peters)

Full Safety and Regulatory Compliance

- 100% production partial discharge and HIPOT test of transformer
- Clearance and creepage distances meet requirements for basic insulation.

Applications

- Traction inverter
- Industrial drives
- Other industrial applications

Description

The ISO6125R-33 is a single channel insulated DC-DC converter, suitable as a power supply for 3300 V IGBT drivers.

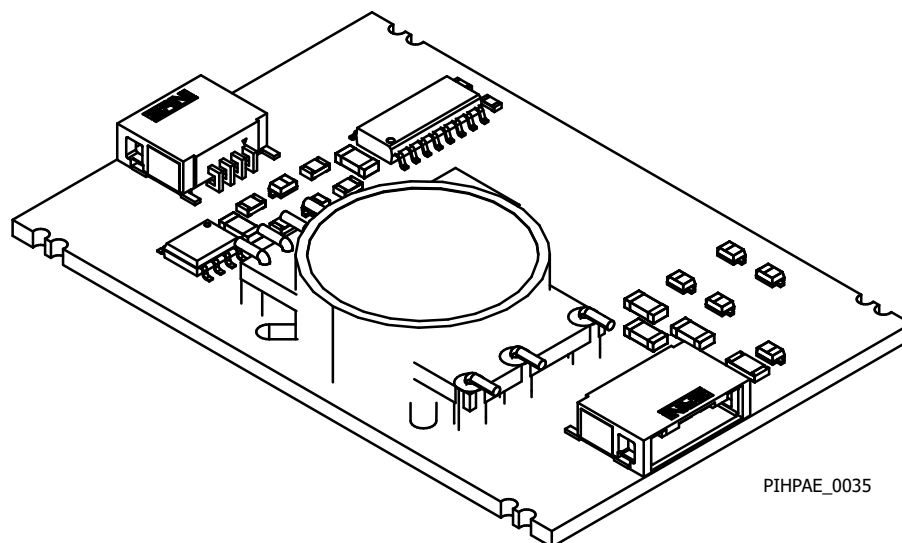


Figure 1. 3D-Picture.

Interface Description

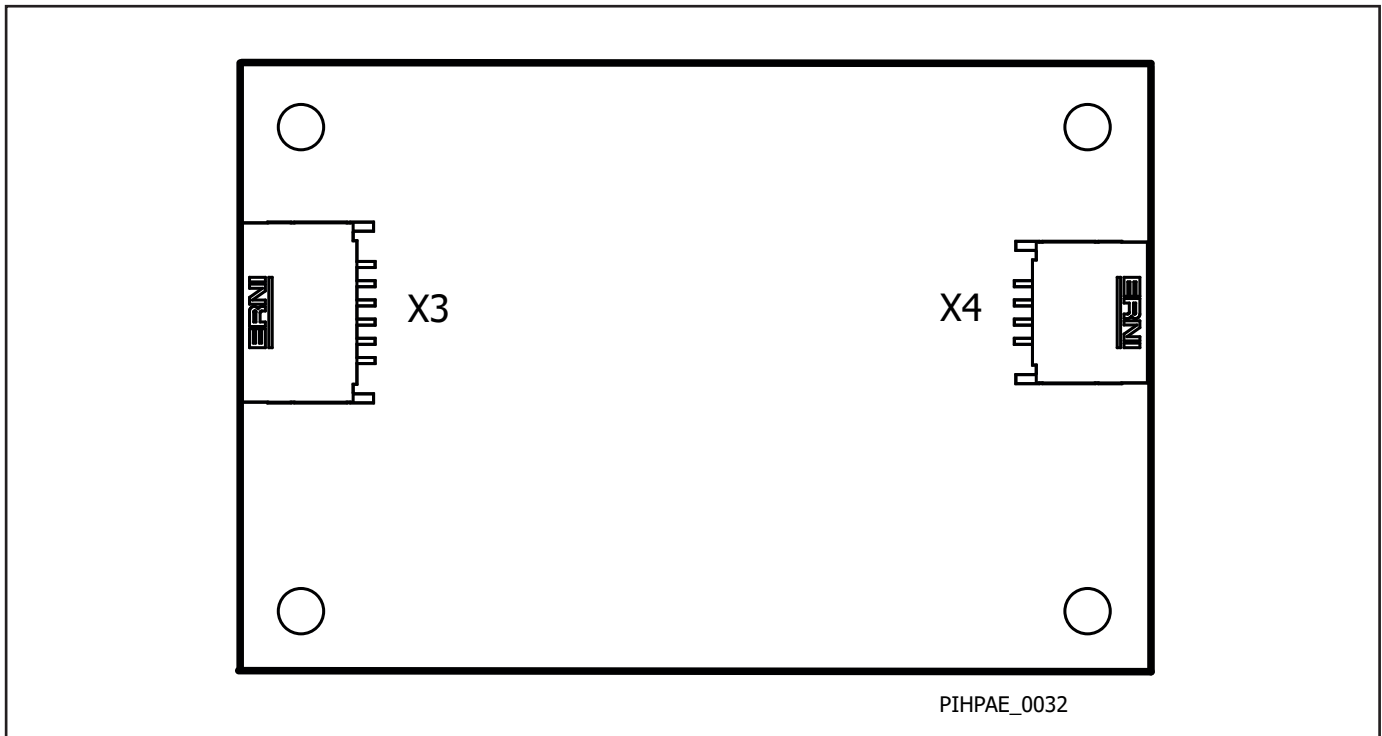


Figure 2. Interface.

Connector X3

Erni pin interface to connect main driver.

Part number: Erni 504275, 6 pin, right angle.

NC (Pin 1, 4)

This pin is not connected.

VISO (Pin 2, 6)

This pin is the secondary side positive supply voltage.

COM (Pin 3, 5)

This pin provide secondary side negative supply voltage.

Connector X4

Erni pin interface to connect external power supply.

Part number: Erni 504255, 4 pin, right angle.

GND (Pin 1, 4)

This pin is the connection for primary side ground potential.

VDC (Pin 2, 3)

This pin is the primary side supply voltage connection.

Absolute Maximum Ratings

Parameter	Symbol	Conditions $T_A = -40\text{ °C to }85\text{ °C}$	Min	Max	Units
Absolute Maximum Ratings¹					
Input voltage	V_{VDC}	VDC must be applied with respect to GND		16	V
Average input current ²	I_{VDC}	Average supply current at full load		900	mA
Average output current	$I_{VISO-COM}$	Average supply current at full load		450	mA
Output power ³	P_{Out}			10	W
Storage temperature ⁴	T_{st}		-40	50	°C
Operating ambient temperature	T_A		-40	85	°C
Surface temperature ⁵	T			125	°C
Relative humidity	H_r	No condensation		93	%
Altitude of operation ⁶	A_{op}			2000	m

Parameter	Symbol	Conditions $T_A = -40\text{ }^\circ\text{C to } 85\text{ }^\circ\text{C}$	Min	Typ	Max	Units
-----------	--------	--	-----	-----	-----	-------

Recommended Operating Conditions
Power Supply

Primary-Side Supply Voltage	V_{VDC}	VDC to GND	14.5	15	15.5	V
-----------------------------	-----------	------------	------	----	------	---

Characteristics

Parameter	Symbol	Conditions $T_A = +25\text{ }^\circ\text{C}$	Min	Typ	Max	Units
-----------	--------	---	-----	-----	-----	-------

Input Characteristics

Supply current	I_{VDC}	$V_{VDC} = 15\text{ V, no load}$		46		mA
		$V_{VDC} = 15\text{ V, } I_{OUT} = I_{VISO} = 55\text{ mA}$		135		
		$V_{VDC} = 15\text{ V, } I_{OUT} = I_{VISO} = 450\text{ mA}$		810		

Output Characteristics

Output voltage	$V_{VISO-COM}$	$V_{VDC} = 15\text{ V, no load}$		25.3		V
		$V_{VDC} = 15\text{ V, } I_{OUT} = I_{VISO} = 55\text{ mA}$		25		
		$V_{VDC} = 15\text{ V, } I_{OUT} = I_{VISO} = 450\text{ mA}$		24.2		

Electrical Insulation

Test voltage ⁷	$V_{VISO,PS}$	Primary-side to secondary side	6			kV _{RMS}
Partial voltage extinct voltage ⁸	$P_{D,PS}$	Primary-side to secondary side	3.63			kV _{pk}
Coupling capacitance	C_C			10		pF
Creepage distance	CPG_{P-S}	Primary-side to secondary side	21			mm
Clearance distance	CLR_{P-S}	Primary-side to secondary side	21			mm

NOTES:

- Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device.
- Refers to the static case. The input current increases with decreasing temperature. The maximum value refers to an operating temperature of -40°C.
- The output voltage is not regulated and decreases with increasing load current. The DC/DC converter is not protected against overload.
- The storage temperature inside the original package or in case the coating material of coated products may touch external parts must be limited to the given value. Otherwise, it is limited to 85°C.
- The component surface temperature, which may strongly vary depending on the actual operating conditions, must be limited to the given value for coated gate driver versions to ensure long-term reliability of the coating material.
- Operation above this level requires a voltage derating to ensure proper insulation coordination.
- The transformer of every production sample has undergone 100% testing at the given value for 1s.
- Partial discharge measurement is performed on each transformer.

Product Dimensions

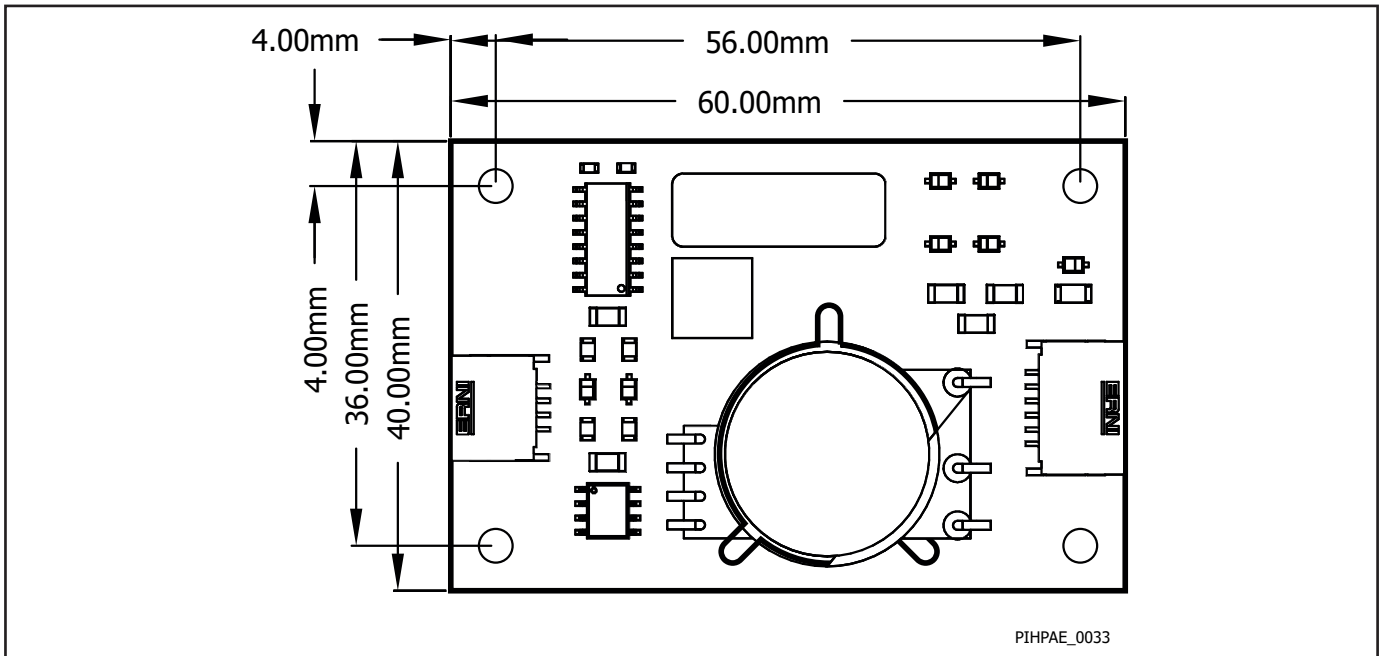


Figure 3. Top View.

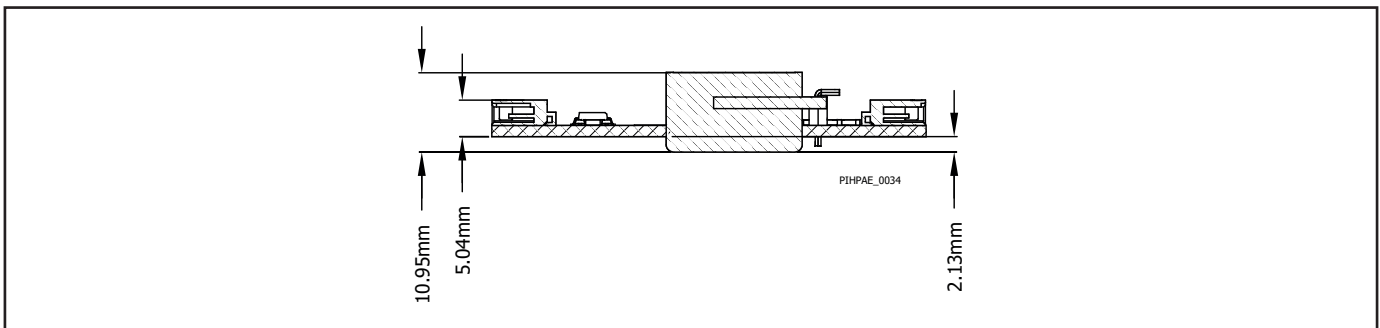


Figure 4. Side View.

Transportation and Storage Conditions

For transportation and storage conditions refer to Power Integrations' Application Note AN-1501.

RoHS Statement

We hereby confirm that the product supplied does not contain any of the restricted substances according Article 4 of the RoHS Directive 2011/65/EU in excess of the maximum concentration values tolerated by weight in any of their homogeneous materials.

Additionally, the product complies with RoHS Directive 2015/863/EU (known as RoHS 3) from 31 March 2015, which amends Annex II of Directive 2011/65/EU.

Revision	Notes	Date
A	Final Datasheet	05/21

For the latest updates, visit our website: www.power.com

Power Integrations reserves the right to make changes to its products at any time to improve reliability or manufacturability. Power Integrations does not assume any liability arising from the use of any device or circuit described herein. POWER INTEGRATIONS MAKES NO WARRANTY HEREIN AND SPECIFICALLY DISCLAIMS ALL WARRANTIES INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY RIGHTS.

Patent Information

The products and applications illustrated herein (including transformer construction and circuits external to the products) may be covered by one or more U.S. and foreign patents, or potentially by pending U.S. and foreign patent applications assigned to Power Integrations. A complete list of Power Integrations patents may be found at www.power.com. Power Integrations grants its customers a license under certain patent rights as set forth at www.power.com/ip.htm.

Life Support Policy

POWER INTEGRATIONS PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF POWER INTEGRATIONS. As used herein:

1. A Life support device or system is one which, (i) is intended for surgical implant into the body, or (ii) supports or sustains life, and (iii) whose failure to perform, when properly used in accordance with instructions for use, can be reasonably expected to result in significant injury or death to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Power Integrations, the Power Integrations logo, CAPZero, ChiPhy, CHY, DPA-Switch, EcoSmart, E-Shield, eSIP, eSOP, HiperPLC, HiperPFS, HiperTFS, InnoSwitch, Innovation in Power Conversion, InSOP, LinkSwitch, LinkZero, LYTSwitch, SENZero, TinySwitch, TOPSwitch, PI, PI Expert, PowiGaN, SCALE, SCALE-1, SCALE-2, SCALE-3 and SCALE-iDriver, are trademarks of Power Integrations, Inc. Other trademarks are property of their respective companies. ©2021, Power Integrations, Inc.

Power Integrations Worldwide Sales Support Locations

World Headquarters

5245 Hellyer Avenue
 San Jose, CA 95138, USA
 Main: +1-408-414-9200
 Customer Service:
 Worldwide: +1-65-635-64480
 Americas: +1-408-414-9621
 e-mail: usasales@power.com

China (Shanghai)

Rm 2410, Charity Plaza, No. 88
 North Caoxi Road
 Shanghai, PRC 200030
 Phone: +86-21-6354-6323
 e-mail: chinasales@power.com

China (Shenzhen)

17/F, Hivac Building, No. 2, Keji Nan
 8th Road, Nanshan District,
 Shenzhen, China, 518057
 Phone: +86-755-8672-8689
 e-mail: chinasales@power.com

Germany (AC-DC/LED Sales)

Einsteinring 24
 85609 Dornach/Aschheim
 Germany
 Tel: +49-89-5527-39100
 e-mail: eurosales@power.com

Germany (Gate Driver Sales)

HellwegForum 1
 59469 Ense
 Germany
 Tel: +49-2938-64-39990
 e-mail: igbt-driver.sales@power.com

India

#1, 14th Main Road
 Vasanthanagar
 Bangalore-560052 India
 Phone: +91-80-4113-8020
 e-mail: indiasales@power.com

Italy

Via Milanese 20, 3rd. Fl.
 20099 Sesto San Giovanni (MI) Italy
 Phone: +39-024-550-8701
 e-mail: eurosales@power.com

Japan

Yusen Shin-Yokohama 1-chome Bldg.
 1-7-9, Shin-Yokohama, Kohoku-ku
 Yokohama-shi,
 Kanagawa 222-0033 Japan
 Phone: +81-45-471-1021
 e-mail: japansales@power.com

Korea

RM 602, 6FL
 Korea City Air Terminal B/D, 159-6
 Samsung-Dong, Kangnam-Gu,
 Seoul, 135-728, Korea
 Phone: +82-2-2016-6610
 e-mail: koreasales@power.com

Singapore

51 Newton Road
 #19-01/05 Goldhill Plaza
 Singapore, 308900
 Phone: +65-6358-2160
 e-mail: singaporesales@power.com

Taiwan

5F, No. 318, Nei Hu Rd., Sec. 1
 Nei Hu Dist.
 Taipei 11493, Taiwan R.O.C.
 Phone: +886-2-2659-4570
 e-mail: taiwansales@power.com

UK

Building 5, Suite 21
 The Westbrook Centre
 Milton Road
 Cambridge
 CB4 1YG
 Phone: +44 (0) 7823-557484
 e-mail: eurosales@power.com