



Electrical Diagram

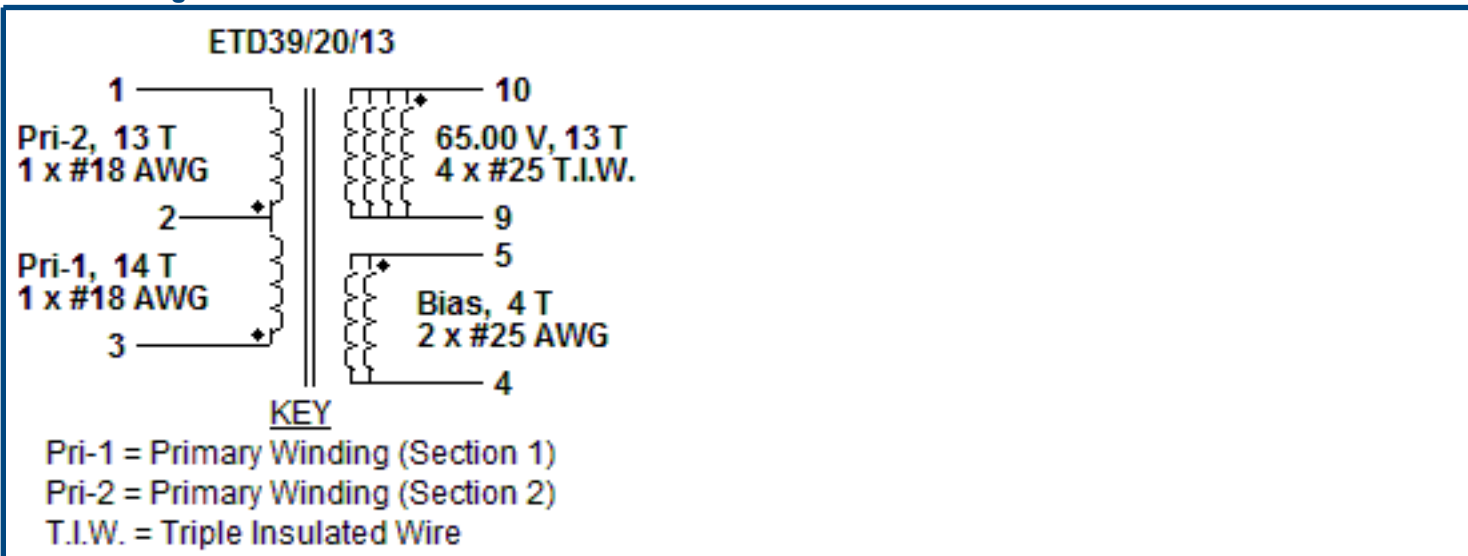

Mechanical Diagram

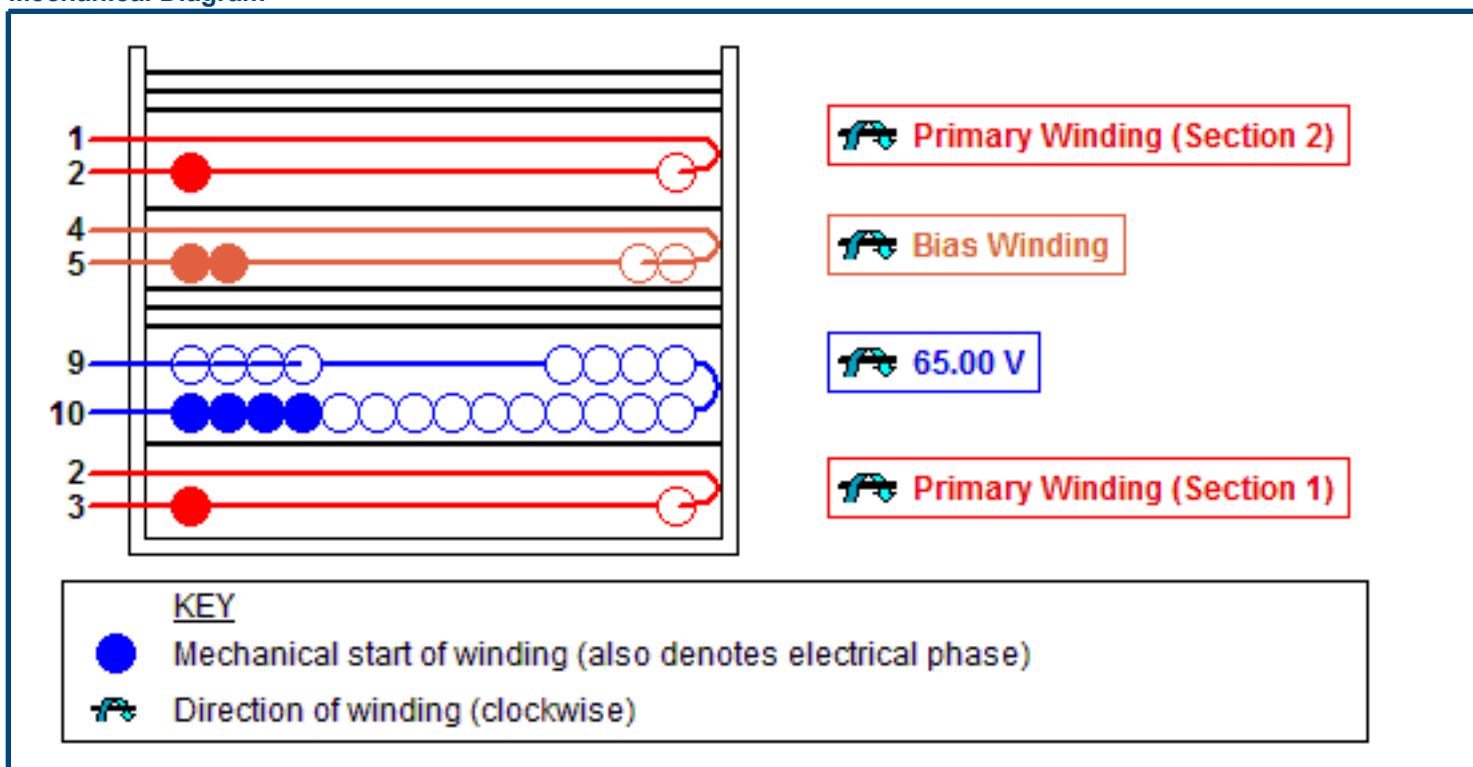

Winding Instruction

Primary Winding (Section 1)

Start on pin(s) 3 and wind 14 turns (x 1 filar) of item [5]. in 1 layer(s) from left to right. Winding direction is clockwise. On the final layer, spread the winding evenly across entire bobbin. Finish this winding on pin(s) 2.

Add 1 layer of tape, item [3], for insulation.

Secondary Winding

Start on pin(s) 10 and wind 13 turns (x 4 filar) of item [6]. Spread the winding evenly across entire bobbin. Winding direction is clockwise. Finish this winding on pin(s) 9.

Add 3 layers of tape, item [3], for insulation.

Bias Winding

Start on pin(s) 5 and wind 4 turns (x 2 filar) of item [7]. Winding direction is clockwise. Spread the winding evenly across entire bobbin. Finish this winding on pin(s) 4.

Add 1 layer of tape, item [3], for insulation.

Primary Winding (Section 2)

Start on pin(s) 2 and wind 13 turns (x 1 filar) of item [5]. in 1 layer(s) from left to right. Winding direction is clockwise. On the final layer, spread the winding evenly across entire bobbin. Finish this winding on pin(s) 1.

Add 3 layers of tape, item [3], for insulation.

Core Assembly

Assemble and secure core halves. Item [1].

Varnish

Dip varnish uniformly in item [4]. Do not vacuum impregnate.

Comments

1. Use of a grounded flux-band around the core may improve the EMI performance.

2. For non margin wound transformers use triple insulated wire for all secondary windings.

Materials

Item	Description
[1]	Core: ETD39/20/13, PC95, gapped for ALG of 179 nH/T ²
[2]	Bobbin: Generic, 8 pri. + 8 sec.
[3]	Barrier Tape: Polyester film [1 mil (25 µm) base thickness], 25.70 mm wide
[4]	Varnish
[5]	Magnet Wire: 18 AWG, Solderable Double Coated
[6]	Triple Insulated Wire: 25 AWG
[7]	Magnet Wire: 25 AWG, Solderable Double Coated

Electrical Test Specifications

Parameter	Condition	Spec
Electrical Strength, VAC	60 Hz 1 second, from pins 1,2,3,4,5 to pins 9,10.	3000
Nominal Primary Inductance, µH	Measured at 1 V pk-pk, typical switching frequency, between pin 1 to pin 3, with all other Windings open.	139
Tolerance, ±%	Tolerance of Primary Inductance	10.0
Maximum Primary Leakage, µH	Measured between Pin 1 to Pin 3, with all other Windings shorted.	2.09

Although the design of the software considered safety guidelines, it is the user's responsibility to ensure that the user's power supply design meets all applicable safety requirements of user's product.